


E: 49964.0776 (m)

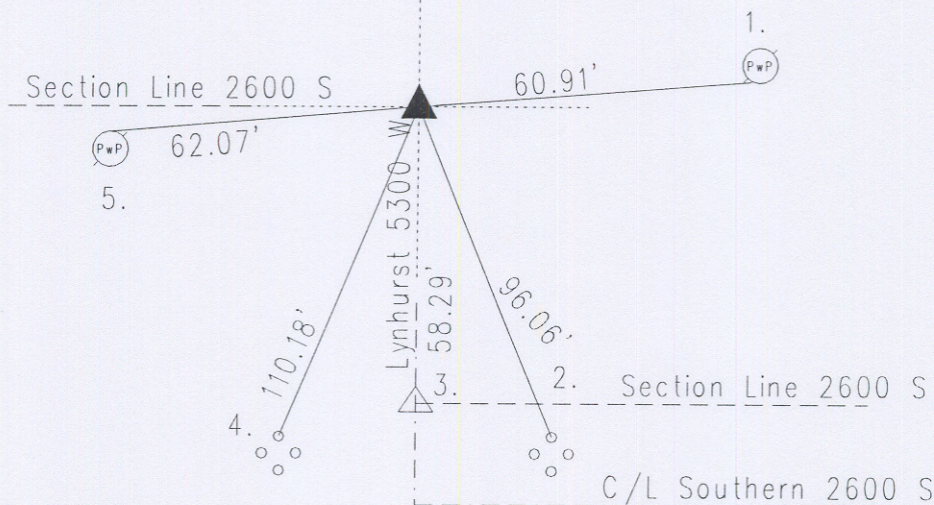

Corner History: Marion County Atlas dated 1883 page 2 called 20" beech S 49 E 34 links; 18" (?type) N 30 W# 24 links as witnesses. Corner reference per Wayne Township Legal Survey Book pg. 62 dated 12-7&8-1868 by O.W. Voorhies. Wayne page 74 dated 2-23-1891 by Paul Julian. Wayne Township Legal Survey Book page 111 dated 10-19-1936 legal survey by H. Bloemker. Corner reference 3"x5" card dated 12-5-1944 stone. Corner reference 1981 called corner. Corner reference 4-30-1962 by Schmidt called iron rod over stone. Corner reference dated 9-11-81 by Wilcoxon called cut 'x'. Corner reference 3-15-90 by Wilcoxon called cut 'x' fd. Corner reference dated 5-1-96 by Wilcoxon called cut 'x'. Corner reference dated 4-23-01 by Wilcoxon called cut 'x'. Corner reference 9-04-07 by Wilcoxon same. Reference 10-09-08 Wilcoxon set Harrison per GPS.

REF.	DISTANCE	DESCRIPTION
1.	60.91'	PK nail S PwP#43-626 12"up
2.	96.06'	Cut 'x' N bolt of aluminum pole base
3.	58.29'	Due S to W Q 19-15-3 Harrison
4.	110.18'	Cut 'x' N bolt of aluminum pole base
5.	62.07'	PK nail N PwP#18-625A 4"up